

# POWER MATE TECHNOLOGY

## WAF150W WAD150W SERIES

DC-DC CONVERTER



WAF150W



WAD150W

4:1 ULTRA WIDE INPUT RANGE  
UP TO 200Watts



### FEATURES

- NO MINIMUM LOAD REQUIRED
- 2250VDC INPUT TO OUTPUT INSULATION
- WAF150:3.86X2.560X0.67 INCH / WAD150:3.86X2.067X0.67 INCH
- CV+CC MODE
- BUILT-IN EN55011 & EN55022 CLASS A FILTER
- SIX-SIDED CONTINUOUS SHIELD
- WALL MOUNT APPLICATION
- TOP SIDE AND BOTTOM SIDE HEAT DISSIPATION
- ADJUSTABLE OUTPUT VOLTAGE
- INPUT REVERSE PROTECTION
- UL60950-1, EN60950-1, IEC60950-1, & EN50155 SAFETY APPROVALS
- CE MARKED
- COMPLIANT TO RoHS II & REACH

### APPLICATIONS

- RAILWAY SYSTEM
- WIRELESS NETWORK
- TELECOM/DATACOM
- INDUSTRY CONTROL SYSTEM
- DISTRIBUTED POWER ARCHITECTURES
- SEMICONDUCTOR EQUIPMENT
- BATTERY CHARGER

2250VDC  
ISOLATION

REMOTE  
CONTROL

UVP

OCP

SCP

OVP

OTP

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	A	mA	%	µF
WAF(D)150-24S12W	9 ~ 36	12	12.5	70	86	40000
WAF(D)150-24S15W	9 ~ 36	15	10	80	86	26000
WAF(D)150-24S24W	9 ~ 36	24	6.3	95	87	10000
WAF(D)150-24S28W	9 ~ 36	28	5.4	120	87	7600
WAF(D)150-24S48W	9 ~ 36	48	3.2	130	86	2600
WAF(D)150-48S12W	18 ~ 75	12	12.5	50	88	40000
WAF(D)150-48S15W	18 ~ 75	15	10	60	89	26000
WAF(D)150-48S24W	18 ~ 75	24	6.3	60	89	10000
WAF(D)150-48S28W	18 ~ 75	28	5.4	70	89	7600
WAF(D)150-48S48W	18 ~ 75	48	3.2	70	88	2600
WAF(D)150-110S12W	43 ~ 160	12	12.5	25	88	40000
WAF(D)150-110S15W	43 ~ 160	15	10	25	89	26000
WAF(D)150-110S24W	43 ~ 160	24	6.3	25	89	10000
WAF(D)150-110S28W	43 ~ 160	28	5.4	25	89	7600
WAF(D)150-110S48W	43 ~ 160	48	3.2	35	88	2600

### PART NUMBER STRUCTURE

WAF150 WAD150	-	24	S	12	W	-	N	F	HC
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range		Remote Control Option	Filter Option	Heat-sink Option
		24:9-36 48:16.5-75 110:43-160	S:Single	12:12 15:15 24:24 28:28 48:48	4:1		□:Positive logic N:Negative logic	□:NC F:With EMI filter module	□:NC HC: H=0.670" Horizontal, 7G-0058A-F

(1) EMI filter meet EN55022 Class B.  
This EMI filter is used for WAD150-24S□□W and WAD150-48S□□W only, not for other items. (Ex: WAD150-24S24W-F)

**INPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)		9	24	36	VDC
	48Vin(nom)		18	48	75	
	110Vin(nom)		43	110	160	
Start-up voltage	24Vin(nom)				9	VDC
	48Vin(nom)				18	
	110Vin(nom)				43	
Shutdown voltage	24Vin(nom)		7.9		8.5	VDC
	48Vin(nom)		15.6		16.8	
	110Vin(nom)		33.0		36.0	
Start up time	Constant resistive load	Power up		35		ms
		Remote ON/OFF		35		
Input surge voltage	1 second, max.	24Vin(nom)			50	VDC
		48Vin(nom)			100	
		110Vin(nom)			185	
Input filter			Pi type			
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON	Open or 3 ~ 12VDC		mA
		(Standard)	DC-DC OFF	Short or 0 ~ 1.2VDC		
		Negative logic	DC-DC ON	Short or 0 ~ 1.2VDC		
		(Option)	DC-DC OFF	Open or 3 ~ 12VDC		
		Input current of Ctrl pin		-0.5		
Remote off input current			3.5		mA	

**OUTPUT SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load		-0.4		+0.4	%
Voltage adjustability	Use a resistor across on the Trim1 and Trim2 to adjust the output voltage.				+20	%
Ripple and noise	Measured by 20MHz bandwidth	12Vout, 15Vout		100		mVp-p
		24Vout, 28Vout		200		
		48Vout		350		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			200		µs
Over voltage protection	% of Vout(nom); Hiccup mode		125		140	%
Over load protection	% of Iout rated; CC Mode		105		120	%
Short circuit protection			Continuous, automatic recovery			

**GENERAL SPECIFICATIONS**

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	2250			VDC
		Input (Output) to Case	1600			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					3500	pF
Switching frequency	24VDC input	48Vout	248	275	303	kHz
		Others	270	300	330	
	48VDC input	48Vout	248	275	303	
		Others	270	300	330	
	110VDC input	All	203	225	248	
Safety approvals					UL60950-1 EN60950-1 IEC60950-1 EN50155	
Case material					Aluminum	
Base material					Aluminum	
Potting material					Silicone (UL94 V-0)	
Weight	WAF150			225g (7.94oz.)		
	WAD150			220g (7.76oz.)		
MTBF	MIL-HDBK-217F, Full load				4.954 x 10 <sup>5</sup> hrs	

## ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating case temperature		-40		+100	°C
Maximum case temperature			+100		
Over temperature protection			+110		°C
Storage temperature range		-55		+125	°C
Thermal impedance (1)	Vertical direction by natural convection (20LFM) Only mount on the iron base-plate Mount on the iron base-plate and top side with 7G-0058A Heat-sink		2.55 2.0		°C/W
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH

## EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI (2)	EN55011, EN55022	DC-DC module Class A
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient (3)	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge (3)	EN61000-4-5 EN55024 ±1kV and EN50155 ±2kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A

### Note:


- (1)The iron base-plate dimension is 19" \* 3.5" \* 0.063" (The height is EIA standard 2U).  
(2)The heat-sink is optional and P/N is 7G-0058A-F.
- The standard modules meet EMI Class A without external components.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Power Mate suggest: WAF(D)150-24S□□W : Nippon chemi-con KY series, 470µF/50V.  
WAF(D)150-24S□□W :: Nippon chemi-con KY series, 220µF/100V.  
WAF(D)150-110S□□W : Nippon chemi-con KXJ series, 150µF/200V.

**CAUTION:** This power module is not internally fused; an input line fuse must always be used. If the load was having sourcing capability (Ex: Battery or Super Capacitor), an output line fuse must always be used.


## CHARACTERISTIC CURVE

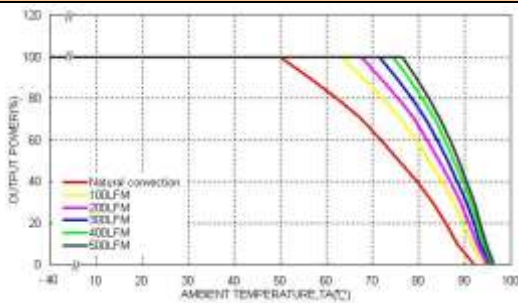


WAF(D)150-48S24W Derating Curve (Note 1)

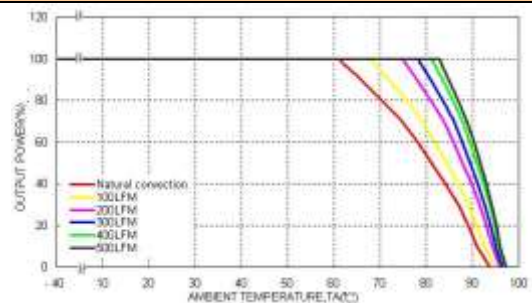

WAF(D)150-48S24W Derating Curve (Note 1)  
With Heat-sink

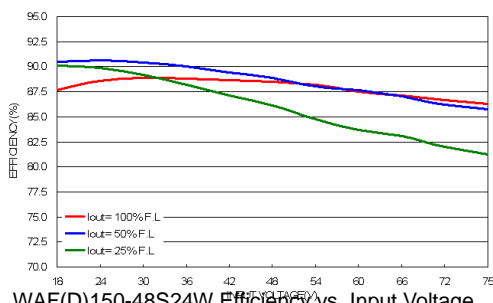


WAF(D)150-48S24W Efficiency vs. Input Voltage

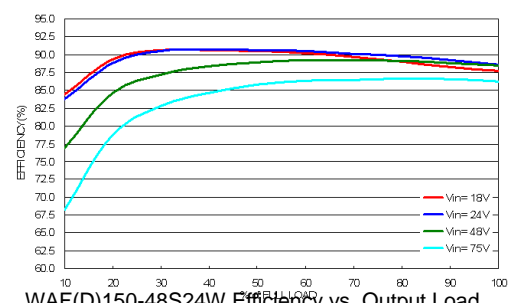


WAF(D)150-48S24W Efficiency vs. Output Load


**CHARACTERISTIC CURVE (CONTINUED)**

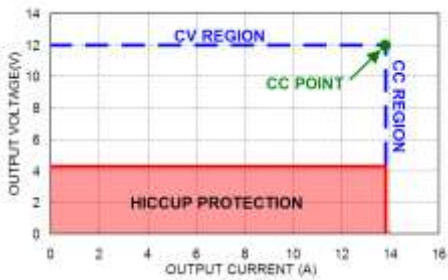


WAF(D)150-□□S12W  
Vout vs. Iout

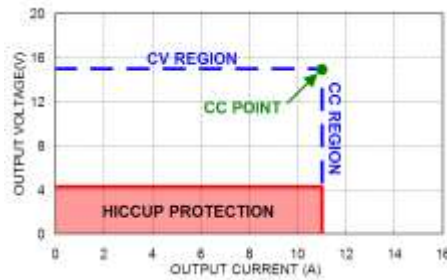


WAF(D)150-□□S15W  
Vout vs. Iout

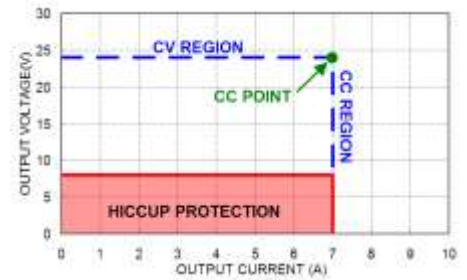

WAF(D)150-□□S24W  
Vout vs. Iout

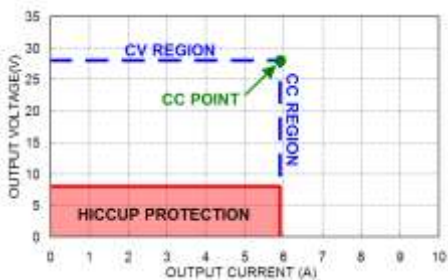

WAF(D)150-□□S28W  
Vout vs. Iout

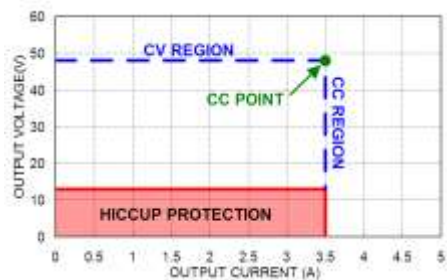


WAF(D)150-□□S48W  
Vout vs. Iout


MODE	DESCRIPTION	CONDITION
CV Region	In normal operation. The output current in datasheet	Resistance Load > Vout / Iout (CC Point)
CC Region	If the output load current are over rating. The output current will keep in a constance value. And output voltage will fall.	Resistance Load < Vout / Iout (CC Point)
Hiccup Protection	If the output resistance is become short. It will operate in hiccup protection.	<p>WAF(D)150-□□S12W, WAF(D)150-□□S15W: Vout &lt; 4.3V (typ.) to Output Short.</p> <p>WAF(D)150-□□S24W, WAF(D)150-□□S28W: Vout &lt; 8.0V(typ.) to Output Short.</p> <p>WAF(D)150-□□S48W: Vout &lt; 13V(typ.) to Output Short.</p>

**MECHANICAL DRAWING**

**WAF**

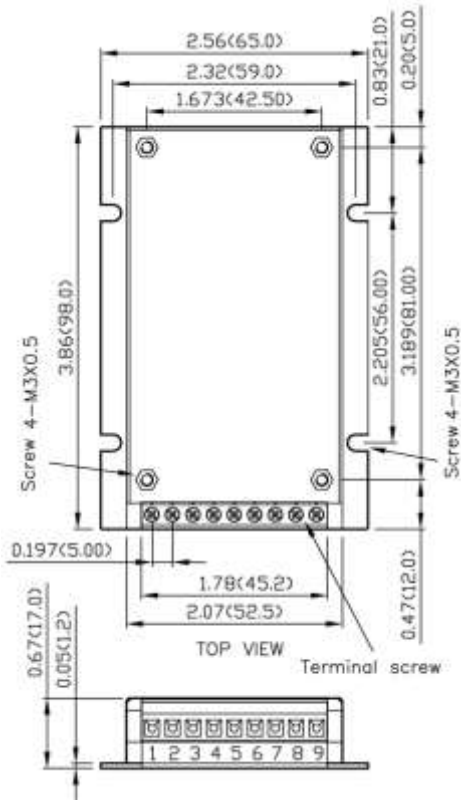

**WAD**

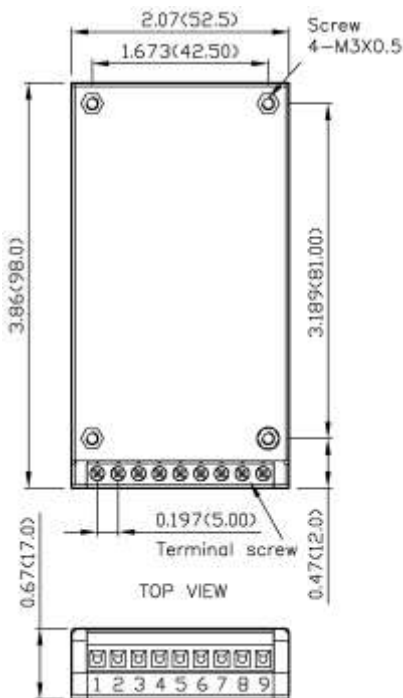


**TERMINAL CONNECTION**

PIN	DEFINE	WIRE GAUGE RECOMMENDATIONS
1	+Vin	14~16AWG
2	+Vin	14~16AWG
3	-Vin	14~16AWG
4	-Vin	14~16AWG
5	Ctrl	14~24AWG
6	+Vout	14~16AWG
7	-Vout	14~16AWG
8	Trim 1	14~24AWG
9	Trim 2	14~24AWG

**EXTERNAL OUTPUT TRIMMING**


Output can be externally trimmed by using the method shown below.



1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)
3. Pole pitch tolerance ±0.01 (0.25)
4. Screw locked torque: MAX 5.0kgf-cm(0.49N-m)
5. Terminal screw locked torque:  
MAX 2.5kgf-cm(0.25N-m)

**MECHANICAL DRAWING (CONTINUED)**

WAD150-24S□□W-F  
WAD150-48S□□W-F

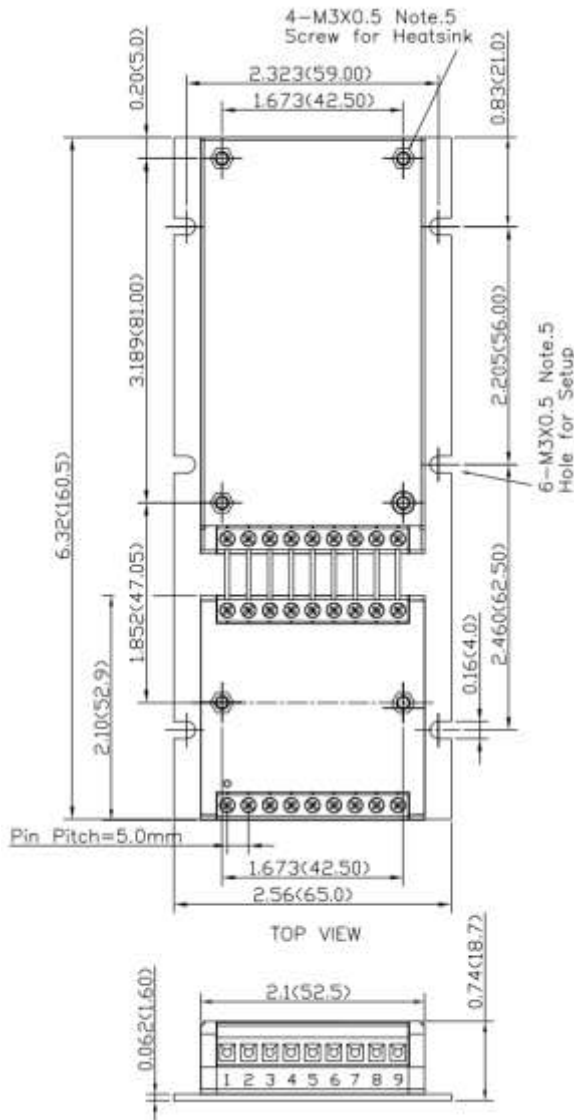


**TERMINAL CONNECTION**

PIN	DEFINE	WIRE GAUGE RECOMMENDATIONS
1	+Vin	14~16AWG
2	+Vin	14~16AWG
3	-Vin	14~16AWG
4	-Vin	14~16AWG
5	Ctrl	14~24AWG
6	+Vout	14~16AWG
7	-Vout	14~16AWG
8	Trim 1	14~24AWG
9	Trim 2	14~24AWG

**EXTERNAL OUTPUT TRIMMING**


Output can be externally trimmed by using the method shown below.



1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)
3. Pole pitch tolerance ±0.01 (0.25)
4. Screw locked torque: MAX 5.0kgf-cm(0.49N-m)
5. Terminal screw locked torque:  
MAX 2.5kgf-cm(0.25N-m)

**HEAT-SINK OPTION**

Heat-sink Part No: 7G-0058A-F, Suffix:-HC

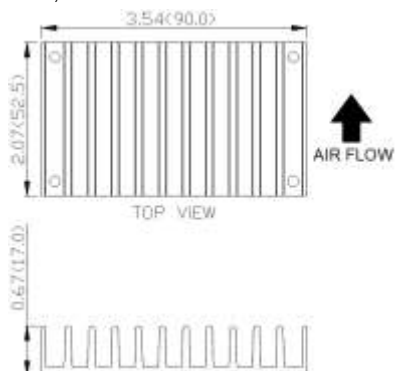

1. All dimensions in inch (mm)
2. Tolerance :x.xx±0.02 (x.x±0.5)  
x.xxx±0.01 (x.xx±0.25)